


GS-2 Grinding Station

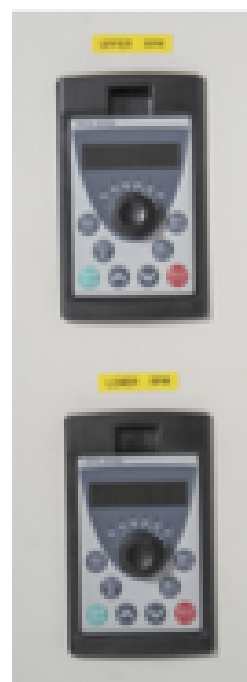

INVERTER FOR
GRINDING WHEELS

MODEL		ANK GS-2
Wire Diameter Range 加工線径範囲		0.3 – 1.6 mm 0.012 – 0.062 in
Outside Diameter Range 加工外径範囲		2 – 20 mm 0.078 – 0.787 in
Free Length Range 加工可能な自由長範囲		3 – 60 mm 0.118 – 2.362 in
Production Rate (One Pass) 生産量(1パス)		560 – 4000 pcs / hour
Grinding Stone Dimension (O.D. * T * I.D.) 砥石の寸法		255 x 50 x 86 mm 10.039 x 1.968 x 3.385 in
Grinding Stone Speed Rate 砥石の回転数		50 ~1805 rpm (Inverter)
Grinding Stone Motor Power (2 Sets) 砥石用モーターのパワー		2.2 kw
Working Table Outside Diameter 作業面の外径		405 mm 15.944 in
Working Table Speed Rate 作業面の回転数		0.1 ~ 1.5 rpm
Working Table Feed Rate 作業面の送り速度		100 ~1810 mm/min 3.937 ~ 71.259 in
Working Table Motor Power 作業面のモーターのパワー		0.5 kw
Working Table Grinding Length 作業台の研削軌跡長さ		188 ~ 222 mm 7.401 ~ 8.740 in
Dimensions 機械の容積	Depth / Length 長	1300 mm 51.181 in.
	Width 巾	1250 mm 49.212 in.
	Height 高	1700 mm 66.929 in
Weight 機械の概算重量		460 kg 1014 lbs
Power 電力容量		3PH 220V 6KVA

Phone: (224) 322-8100
Website: www.dws-mc.com
Email: sales@dws-machineco.com

**Keep It
Simple & Smart**

Specifications are subject to actual delivery 納品仕様は実機ベースです